



OPTIMIX

2G 30-710

2G 40-950



Application

Submersible motor
 Dry matter content up to 8 %
 Substrate temperature up to 55°C
 pH-value 6.5 - 8.2

Motor

Motor power: 3.0 kW, 4.0 kW
 400 V, 50 Hz, special tension on request
 Protection class IP 68, up to 10 m submergence
 PTC thermistors 130 °C for overheat protection
 Own oil circulation, turbine oil

Electric cable

Standard length 10 m, with pressed-on cable gland
 Microbe resistant cable 4 x 2.5 + 2 x 1 mm², Ø 20 mm
 Strain relief 800 N

Corrosion protection

Ductile cast iron housing (GGG40)
 Agitator has a two component epoxy coating
 Agitator galvanically isolated from the guide mast

Propeller

3-blade high efficiency propeller, dynamically balanced

Optimix 2G	3.0 kW	propeller LD 380	710 rpm
Optimix 2G	4.0 kW	propeller LD 310	950 rpm

Galvanized, hardened steel, ss304 or hardened ss304

Guide mast connection

Guide mast support with 4 rollers for smooth height adjustment:
 80 / 100 / 120 mm square mast
 Special sizes on request

Bearing

Bearing flange with mechanical seal of SiC/SiC
 2 Tapered roller bearings to absorb the axial forces
 Bearing flange with separate oil chamber
 Oil Longlife

Ex zone

Authorized for Ex-Zone 2
 ATEX Classification   II 3G Ex ec h IIA T3 Gc


Control box (optional)

Soft start or frequency converter

OPTIMIX

2G 30-710

2G 40-950

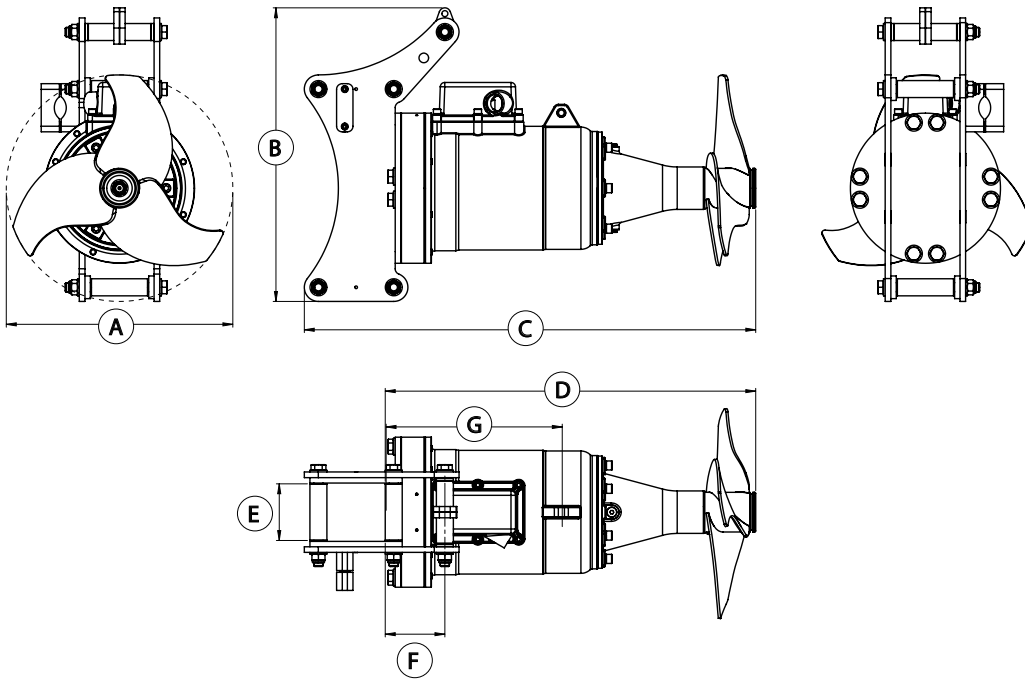

Dimensions

Type	A [Ø in mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]			
2G 30-710	380	520	800	650	80 / 100 / 120	105	310			
2G 40-950	310	520	800	650	80 / 100 / 120	105	310			

Technical data

Type	Rated Power [kW]	Rated Voltage [V]	Full load current [A]	Frequency [Hz]	Power factor cos ϕ	Propeller speed [rpm]	Propeller diameter [mm]	Axial force [kN]	Flow velocity [m/s] *	Pumping rate [m ³ /min]	Weight approx. [kg]
2G 30-710	3.0	400	7.8	50	0.68	710	380	0.7	3.6	23	150
2G 40-950	4.0	400	8.6	50	0.79	950	310	0.7	3.0	13	150

Subject to technical changes

* measured in water and 1.2 m distance