
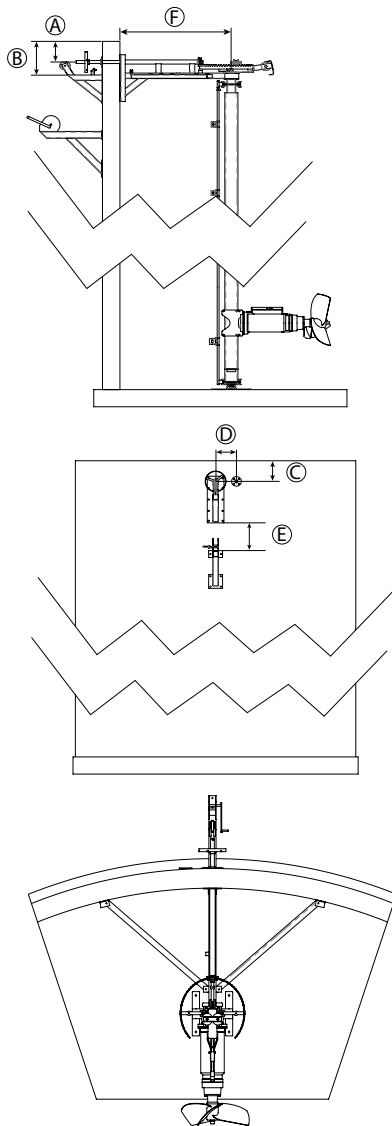


# MGD MAST GASTIGHT WALL LEAD THROUGH

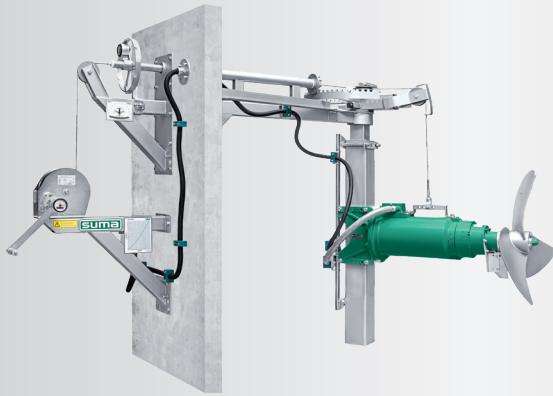

## Application

Mounting system for use in a concrete tank with heights up to 14 m.

## Construction

Guide mast 100 x 100 / 120 x 120 / 150 x 150 mm ss316  
 ss304-cable winch cable in ss316 (max. tension 900 kg)  
 Cable guidance behind the mast

Optional:

Height indication - to determine the exact height of the agitator within the tank

Angle display - to determine the exact angle of the agitator within the tank

## Benefits

- Easy to install
- Safe to operate submersible agitator
- High durability construction
- Mixer turnable left/right (total 210°) at any height

## Dimensions

Type	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]
MGD	300	490	300	300	var.	1,215

Subject to technical changes