

## OPTIMIX

### 2A 135-280

### 2A 135-380



#### Application

Submersible motor for ex-zone 1 or aggressive media with low pH-values  
 Dry matter content up to 12 %  
 Substrate temperature up to 52°C  
 pH-value 5.5 - 8.2 / optional ss316 pH-value 4.5 - 8.2

#### Motor

Motor power: 13.5 kW  
 400V, 50Hz, special tensions on request  
 Protection class IP 68, up to 10 m submergence  
 PTC thermistors 130 °C for thermal protection  
 Separat oil chamber, turbine oil

#### Gear

Flange mounted planetary gear  
 Reduction ratio  $i = 5.25$  or  $3.83$   
 Longlife gear oil  
 Change oil after 4,000 operating hours

#### Electric Cable

Pressed cable gland, cable standard length 10 m  
 Cable  $7 \times 4 + 4 \times 1 \text{ mm}^2 \text{ } \varnothing 20 \text{ mm}$ , shielded  
 Resistant against biomass microbes  
 Strain relief 800 N

#### Corrosion protection

Housing and guiding unit in ss304  
 Optional completely manufactured in ss316

#### Propeller

3-blade propeller, dynamically balanced

Optimix 2A	13,5 kW	propeller HD+800	280 rpm
Optimix 2A	13,5 kW	propeller HD+620	380 rpm

ss304, hardened ss304 or ss316

#### Guide mast connection

Guide mast support with 4 rollers for smooth height adjustment:  
 13.5 kW: 100 / 120 / 150 mm square mast  
 Special sizes on request

#### Bearing

Bearing flange with mechanical seal SiC/SiC  
 2 tapered roller bearings to absorb the axial forces  
 Shaft in hardened steel  
 Separat oil chamber, longlife gear oil  
Accessory: POM protection to minimize abrasion

#### Ex zone

Authorized for Ex-Zone 1  
 Electrical: **CE**  II 2G Ex e IIA T3 Gb  
 Mechanical: **CE**  II 2G Ex ck IIA T3





#### Control box (optional)

Soft start or frequency converter

## OPTIMIX

2A 135-280

2A 135-380

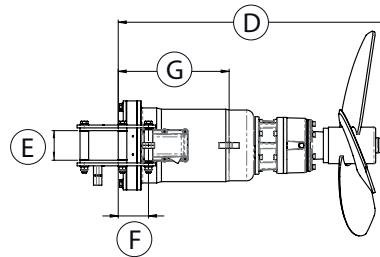

### Dimensions

Type	A [Ø in mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]					
2A 135-280	800	520	1.195	995	100 / 120 / 150	105	385					
2A 135-380	620	520	1.160	960	100 / 120 / 150	105	385					

### Technical data

Type	Rated Power [kW]	Rated Voltage [V]	Full load current [A]	Frequency [Hz]	Power factor cos φ	Gear reduction ratio	Propeller speed [rpm]	Propeller diameter [mm]	Axial force [kN]	Flow velocity [m/s] *	Pumping rate [m³/min]	Weight approx. [kg]
2A 135-280	13.5	400	24	50	0.90	5.25	280	800	2.9	3.2	93	190
2A 135-380	13.5	400	24	50	0.90	3.83	380	620	2.6	3.7	64	190

Subject to technical changes

\* measured in water and 1.2 m distance